

Runway 3

Ceiling mounting / Hardwired

Have a licensed electrician install this fixture. Turn off power at the breaker and verify the circuit is de-energized before work. Confirm supply voltage and mounting support.



Pendant count

3

Supplied cord

6 ft per pendant

Adjustment

Each cord adjusts independently

Brass hardware shown

01 Mount and set the drops

Secure the supplied bracket to a suitable ceiling junction box. Support the fixture while setting each pendant height and secure its cord retention hardware before wiring.

02 Connect the actual harness

Connect fixture hot, neutral and grounding conductors to the corresponding supply connections. Use connectors rated for the actual wire count and gauges; follow their instructions.

03 Close the canopy

Arrange conductors inside the junction box without pinching them. Position the rectangular canopy over its bracket and secure the supplied canopy mounting screws.


04 Complete every pendant

With power still off, fit each printed assembly and supplied bulb as described on page 2. Keep sockets exposed and at least 1 in between printed stacks.

Runway 3

Printed assembly, bulb and final check / Hardwired

Disconnect power before handling the socket or bulb. Support the printed pieces while fitting the retaining parts; do not support them by the bulb.

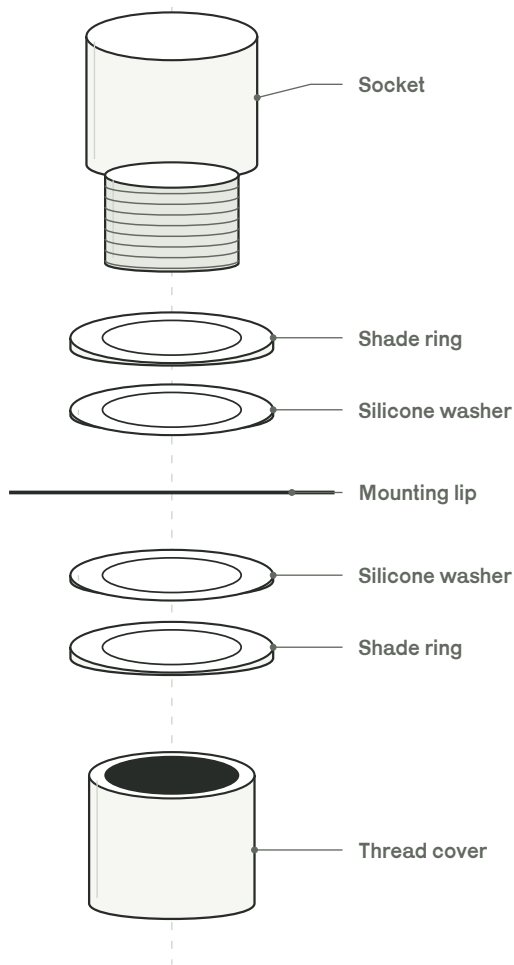

Retaining parts / exploded detail

The printed part is clamped at its internal mounting lip between the two washers and shade rings. The exposed-bulb spacer is not used in this shaded assembly.

01 Place the retaining parts

Place a shade ring and silicone washer on each side of the printed mounting lip. Pass the socket through the mounting opening.

02 Secure the printed assembly

Thread the socket cover onto the socket until snug. Do not overtighten. Check that the printed assembly is retained securely before releasing support.

03 Fit the supplied LED bulb

Use the supplied T30 / E26 / 12 W LED bulb. Hardware maximum: 60 W per bulb. Keep the bulb clear of the retaining hardware and printed pieces.

04 Check, then power on

Check mounting screws, cord retention where present and every printed assembly. Restore power only after assembly is secure. If anything is loose, damaged or does not fit, leave power off and contact Eldon Trace.

Care: disconnect power and allow bulbs to cool before cleaning or changing a bulb. Retain these instructions with your fixture.