


Wallflower

Plug-in / Wall mounting

Disconnect power before work. Turn off power at the circuit before any wiring and consult a licensed electrician.

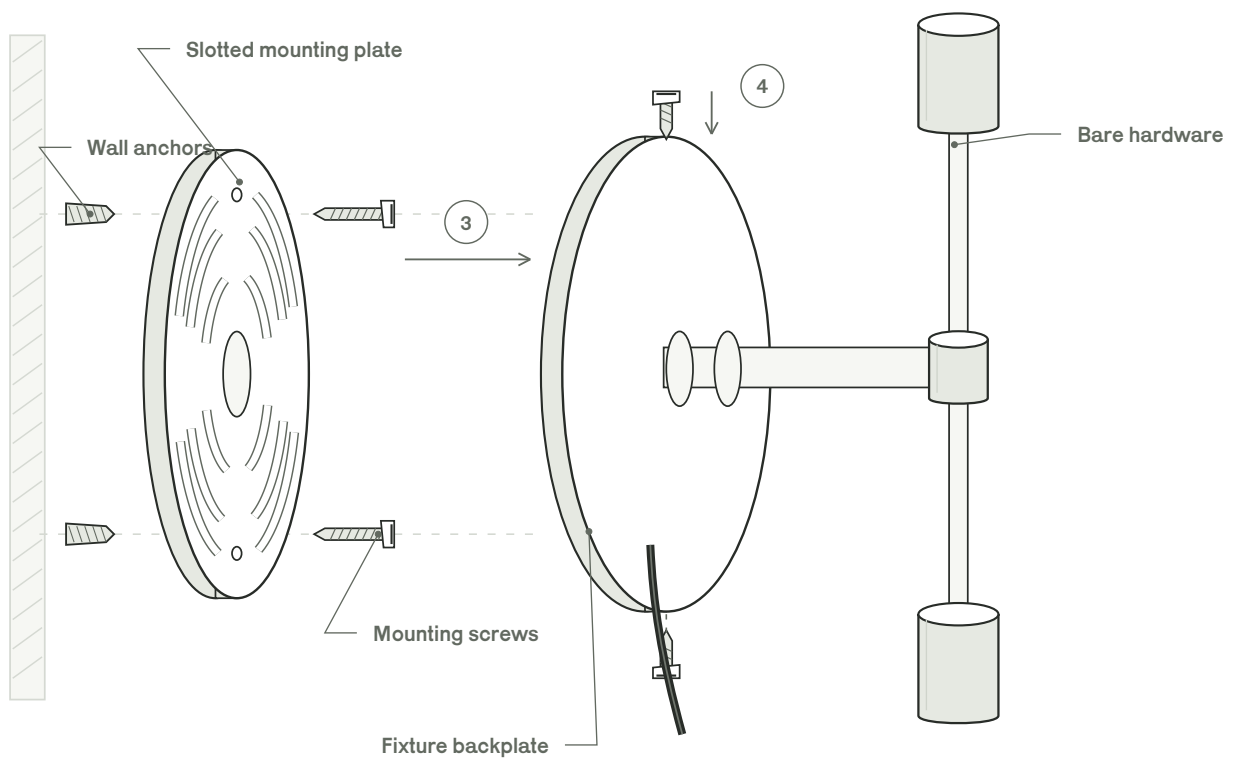

EXPLODED ASSEMBLY / schematic hardware profiles and slot pattern


- 01 Level the mounting plate at the desired wall location. Mark the screw positions with a pen or punch.
- 02 Drill the holes and install drywall anchors. Anchors may be omitted only when fastening directly into a stud, as described in the source guide.
- 03 Attach the mounting plate with the provided screws. Keep the plate completely flush against the wall.
- 04 Align the side holes in the fixture backplate with those in the mounting plate. Secure with the provided screws.

Use mounting hardware suitable for the surface and completed fixture weight. Continue to the final page for the printed assembly and supplied bulb. Keep power disconnected until assembly is secure.

Wallflower

Printed assembly, bulb and final check / Plug-in

Disconnect power before handling the socket or bulb. Support the printed pieces while fitting the retaining parts; do not support them by the bulb.

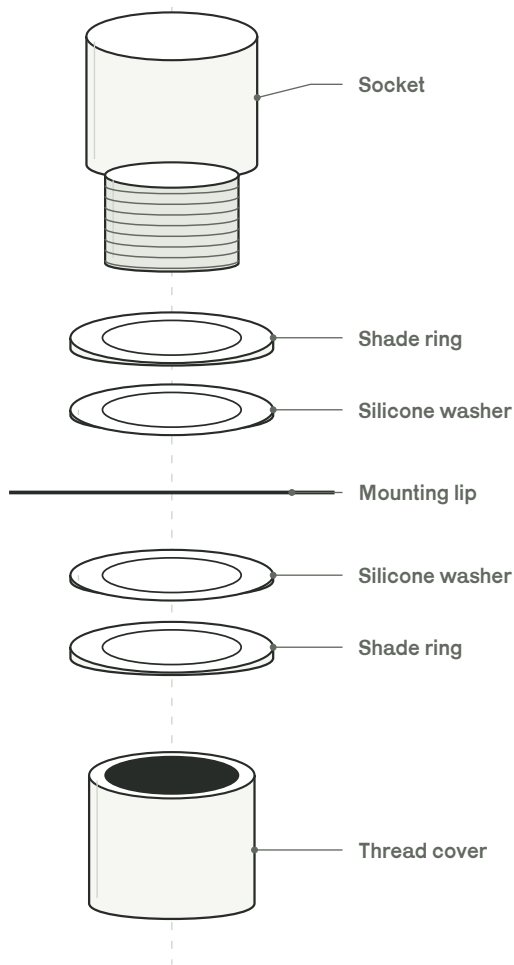

Retaining parts / exploded detail

The printed part is clamped at its internal mounting lip between the two washers and shade rings. The exposed-bulb spacer is not used in this shaded assembly.

01 Place the retaining parts

Place a shade ring and silicone washer on each side of the printed mounting lip. Pass the socket through the mounting opening.

02 Secure the printed assembly

Thread the socket cover onto the socket until snug. Do not overtighten. Check that the printed assembly is retained securely before releasing support.

03 Fit the supplied LED bulb

Use the supplied T30 / E26 / 12 W LED bulb. Hardware maximum: 60 W per bulb. Keep the bulb clear of the retaining hardware and printed pieces.

04 Check, then power on

Check mounting screws, cord retention where present and every printed assembly. Restore power only after assembly is secure. If anything is loose, damaged or does not fit, leave power off and contact Eldon Trace.

Care: disconnect power and allow bulbs to cool before cleaning or changing a bulb. Retain these instructions with your fixture.